MARION COUNTY SURVEYOR'S OFFICE

SECTION CORNER RECORD

DEBRA S. JENKINS MARION COUNTY SURVEYOR

SEC. 21 TWN. 14_{N} RNG. 2_{E}

BRYAN F. CATLIN, PLS TECHNICAL SUPERVISOR



Party Chief: Greene


Crew: Taylor


Type of Marker: Harrison

Method of Establishment: County: 3-8-1996

IN S.P.C. E Zone, NAD 83

Name: 14022108 N: 486 902.809 3(m) E: 44 186.137 6(m)



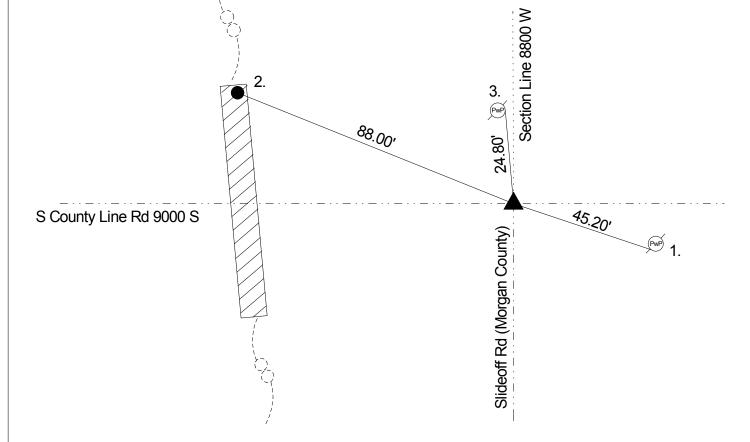

Original post set in 1820 by Laughlin with witnesses: 5" beech S 24 E 26 links; 12" ash N 20 W 30 links per Marion County Atlas pg. 1. Decatur Township Legal Survey book pg. 45 called for a stone. 8-24-1967 MCSO called steel pin. 12-9-74 MCSO called an iron pipe. Excavated 7-8-86 and Harrison set. Retied 3-8-1996 by Wilcoxen. Retied 9-21-2000 by Kiste. Retied 1-28-05 by Wilcoxen. Retied 8-3-09 by Greene.

REF.	DISTANCE	DESCRIPTION
1.	45.20'	Mag nail w/brass washer SW PwP #2-M03-F 3 D 30" up
2.	88.00'	Cut 'x' in bolt 1'+/- south of North end of pipe over creek
3.	24.80'	Mag nail w/brass washer E PwP #264-801 W 30" up